

ORCA

ROLL-IN DOOR WASHER



A Heavy-Duty Machine Built With Commercial Customers In Mind

Eliminate the need to manually clean parts with an old scrub tub, pressure washer or potentially harmful solvents. The Orca roll-in door parts washing system is automatic and in many cases, can pay for itself in less than one year through avoided labor costs. Available in three turntable sizes of 25, 31 and 36 inches, the Orca provides powerful cleaning in a compact space. Some of its standard features include:

Sprocket-Driven Turntable

Unlike competitors, the Orca uses a sprocket driven turntable that eliminates chains, belts and tire drives, which can stretch or slip resulting in poor cleaning performance, increased maintenance and component replacement.

Oil Skimmer

The Orca comes equipped standard with a disc style oil skimmer to remove oily residues and help extend the life of your cleaning solution.


Swing-Down Spray Bar

The swing-down spray bar reduces the distance from the part to the nozzle for better impingement on smaller parts, providing faster, more efficient cleaning.


Vertical, No-Seal Pump

The vertical, no-seal pump ensures that you'll never have to worry about pump leaks or changing seals.




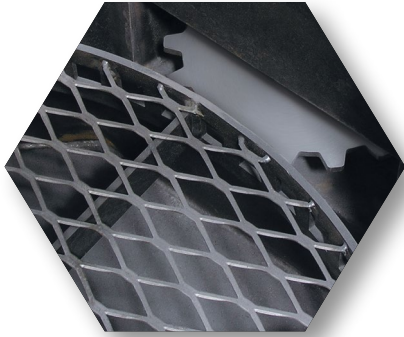

Sprocket Driven Turntable

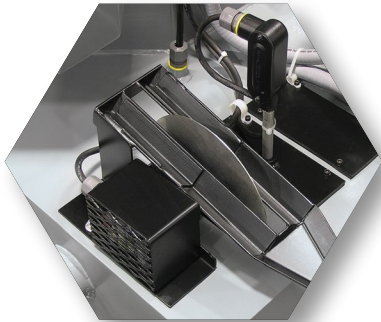

Oil Skimmer

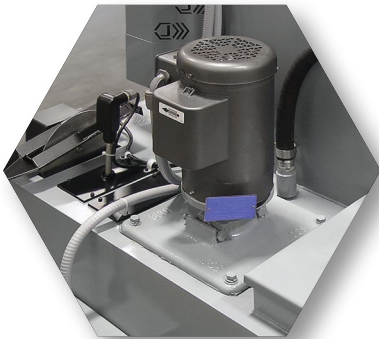

Vertical, No-Seal Pump



Swing-Down Spray Bar

STANDARD FEATURES:

- » Precision V-Jet Brass Nozzles
- » Mechanical Door Seal
- » Gear-Driven Turntable
- » Forklift Access Pockets
- » Vertical, No-Seal Pump
- » 8" Wheel Oil Skimmer
- » 60-Minute Wash Timer
- » Swing-Down Spray Bar
- » Chip Basket
- » Low Water Shut-Off System
- » Overfill Drain

- » Seven-Day Programmable Timer for Heat and Skimmer

- » Auto Water Fill

OPTIONS:

- » Parts Baskets
- » Parts Tree
- » Hydro Spray Detail Wand - Utilizes Customer Supplied Shop Air to Propel Heated Solution Through a Hand Held Wand
- » Steam Exhaust Fan
- » Casters
- » Bag Filter System (assembly required)

SYSTEM SPECS:

	ORCA-2532	ORCA-3142	ORCA-3648
TURNTABLE DIAMETER (in)	25	31	36
INSIDE WORKING HEIGHT (in)	32	42	48
WEIGHT CAPACITY (lbs)	1,000	1,000	1,500
LOAD HEIGHT (in)	29	29	30
SOLUTION (gallons)	60	80	110
PUMP (hp)	3	3	5
PUMP OUTPUT (psi/gpm)	45/50	45/50	58/85
HEAT (kw)	6	6/1PH or 12/3PH	12
LOAD DESIGN	roll-in door	roll-in door	roll-in door
OVERALL DIMS (WxDxH) (in)	36x51x68	42x56x78	47x65x85
WEIGHT (TANK EMPTY) (lbs)	800	1,000	1,200
AMPS 230V/1PH	44	44	89.8
AMPS 208V/1PH	50	50	93.4
AMPS 208V/3PH	29.25	45.9	54
AMPS 230V/3PH	27.7	42.7	48.3
AMPS 460V/3PH	15.4	22.9	24.2
AMPS 575V/3PH	10.4	16.4	19.6
LISTING			

